

125,000 BTU **FORCED AIR HEATER**







POWDER COATED **TUBULAR STEEL HANDLES**

MULTI-PURPOSE





KT177780

125,000 BTU Kerosene Forced Air Heater

- Thermally protected motor Heats up to 3,125 square feet
- Directly light the flammable gas with the continuous spark ignition
- · Portable design with trolley
- Power Supply: 110V/60Hz
- Fuel Tank Capacity: 10 Gallons
- Fuel Consumption: 1gph
- ETL certified

Multi-purpose heater can be used in a garage or on the worksite. The 125,000 BTU Forced Air Kerosene heater is made with heavy-duty quality materials to withstand any worksite. Powder-coated tubular steel handles, and a split upper shell designed for easy maintenance. Equipped with high output thermally protected motor with electronic flame control with photocell is a perfect fit for any worksite.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov







40,000-60,000 BTU **FORCED AIR HEATER**





POWDER COATED **SHELL**











KT177781

40,000 – 60,000 BTU Propane Forced Air Heater

- Efficient combustion, odorless, no fumes
- Directly light the flammable gas with the continuous spark ignition
- · Safety shutdown on gas/flame/fan failure and overheat
- Power Supply: 110V/60Hz Air Flow: 500m3/h
- Heats up to 1,500 square feet
- Gas Consumption: 1.83-2.2 lb/h
- Includes regulator and hose
- CSA certified

Lightweight compact design heater can be used in a garage or on the worksite. The 40,000-60,000 BTU Forced Air Propane heater is made with heavy-duty quality materials to withstand any worksite. Powder-coated long-lasting shell protects an efficient combustion odorless element that produces no fumes. Equipped with safety shutdown on gas/flame/fan failure and overheat protection.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HEATING AREA




TANK TOP **PROPANE HEATER**





8.3 IN.



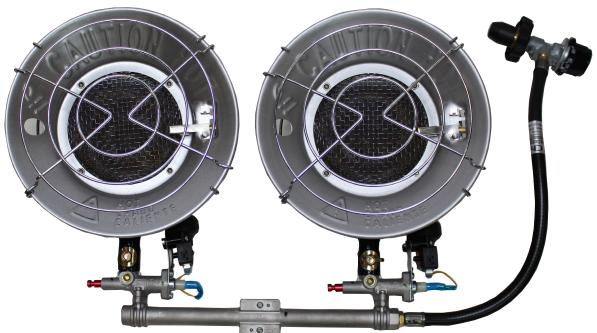



KT177782

18,000 - 30,000 BTU Tank Top Propane Heater

- . Mounts on 20lb propane cylinder
- · Safety anti-tip device shutdown
- Temperature Control Variable
- Variable Heat Output: 18K-26K-30K BTU's
- Heats up to 1,000 square feet
- Reflectors dia. 8.3 inches
 CSA certified
- · Provides radiant infrared heat
- · Tank/cylinder not included

The tank top propane heater mounts directly to a standard 20 lb. liquid propane tank and uses a standard POL tank connection. Variable heat control valve so you can always have the perfect temperature. Can be used indoors or outdoors. The high-efficiency heat reflectors point the heat in the direction needed most. Perfect for drywall joint compound drying.



PLEASE NOTE:

All prices are subject to change at any time without notice.

Due to recent Tariff changes by the U.S. Government, it may be necessary to implement a Force Majeure pricing event on certain products.

This advertisement was prepared in advance, therefore, merchandise availability could be limited and is subject to the delivery schedule of the manufacturers. Advertised items may not be stocked by all locations. We are not responsible for typographical, pictorial, or pricing errors.

Products within this advertisement may contain chemicals known to the State of California under Proposition 65 ("P65") to cause cancer, birth defects or other reproductive harm. Many products are noted with a P65 WARNING; however, the warnings may not apply to all items. Further, as this is a new regulation and all vendors may not have yet identified their products as subject to P65, all items that need a warning may not be noted. Contact the manufacturer for specific details regarding P65. We appreciate your understanding as we navigate these new requirements.

CAUTION:

Always wear appropriate safety equipment and observe safety advice and proper use of equipment as instructed in warning and caution labels and operating instructions.

4000 1236 3678 9010 **TULLY 100 *** \$4.72* *** \$1.00 *** \$1.72* \$1.00 ***

CUSTOMER REBATES (ACCOUNT CREDITS and/or GIFT CARDS):

- Customer must be registered to receive rebates.
- ISN cannot postdate registrations prior to the actual registration date; therefore, rebates cannot be paid out retroactively for prior purchases or promotions.
- Customer only needs to register once. Upon completion of the form and approval from ISN Controller, customer will be registered for all ISN customer rebates (account credit/ gift card) programs going forward.

To register, complete the form at https://www.toolweb.com/rebate-reg

- All accounts must be current to receive CUSTOMER REBATES and/or dated terms & must be approved by the ISN Controller. Other conditions may apply.
- Please allow 2-4 weeks after end of promotion for Customer Rebates to be fulfilled.
- 15% restocking fee will be assessed to your account upon return of documented invoice.
- Order value is based upon invoice value (Shipment Value). All orders must ship to 1 single shipping location.
- No discounts or price changes apply.
- No back-orders.
- No Direct Ships, Shippable products only.
- ISN reserves the right to substitute any gift items based on availability.